UTILITY

PATENT APPLICATION

TRANSMITTAL

Day for new nonprovisional applications under 37 CFR 1.53(b)) RYUZO KOANA

Attorney Docket No. 862.2339 First Named Inventor or Application Identifier

= H			Express Mail Labe	Express Mail Label No.			
APPLICATION ELEMENTS See MPEP chapter 600 concerning utility patent application contents.			ots. ADDRES	ASSISTANT Commissioner for Patents Box Patent Application Washington, DC 20231			
1. Fee Transmittal Form (Submit an original, and a duplicate for fee processing)			6 Mi	6. Microfiche Computer Program (Appendix)			
2. X Specification Total Pages 39				7. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)			
3. X Drawing(s) (35 USC 113) Total Sheets 7			a.] b.	$\overline{}$	Computer Readabl Paper Copy (identi	e Copy cal to computer copy)	
4. X Oath or Declaration Total Pages 2			с.	s	Statement verifyin	g identity of above copies	
a. X No	a. X Newly executed (original or copy)			ACCOMPANYING APPLICATION PARTS			
b. Unexecuted for information purposes			° L	8. X Assignment Papers (cover sheet & document(s))			
c. Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional with Box 17 completed) [Note Box 5 below]			ad) 37		3(b) Statement e is an assignee)	Power of Attorney	
i. DELETION OF INVENTOR(S) Signed Statement attached deleting inventor(s) named in the prior application,			n, 10. En	10. English Translation Document (if applicable)			
see 37 CFR 1.63(d)(2) and 1.33(b). 5. Incorporation By Reference (useable if Box 4c is checked) The entire disclosure of the price amplication from which a con-			11 Sta	11. Information Disclosure Copies of IDS Statement (IDS)/PTO-1449 Citations			
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4c, is considere as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.			ered 12. Pre	eliminary	Amendment		
and is fieldby incorporated by felerance therein.				13. X Return Receipt Postcard (MPEP 503) (Should be specifically itemized)			
			14. []	nall Entity atement(Statement filed in prior application still proper and desired	
			Ce	rtified Co	opy of Priority Do priority is claimed)	cument(s)	
			ļ [-	her:	•		
17. If a CONTINUING APPLICATION short approximation to the state of th							
17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information: Continuation Divisional Continuation-in-part (CIP) of prior application No/							
18. CORRESPONDENCE ADDRESS							
Customer Num	. or Attach bar code labe	el here)	or X Cor	respondence address below			
NAME FITZPATRICK, CELLA, HARPER & SCINTO)	:			
	277 D-1. A			· · · · · · ·			
Address	277 Park Avenue						
City	New York	State	New York		Zip Code	10172-0194	
Country	U.S.A.	Telephone	212-758-2400		Fax	212-758-2982	

•	_

CLAIMS	(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) CALCULATIONS
	TOTAL CLAIMS (37 CFR 1.16(c))	35-20 =	15	X \$ 22.00 =	\$330.00
	INDEPENDENT CLAIMS (37 cfr 1.16(b))	8-3 =	5	X \$ 82.00 =	\$410.00
	MULTIPLE DEPENDENT	CLAIMS (if applicable) (37 CFR 1.16(d))		\$270.00 =	\$0
				BASIC FEE (37 CFR 1.16(a))	\$790.00
			Total of a	bove Calculations =	\$1530.00
	Reduction by 50)% for filing by small er	ntity (Note 37 CFR 1.9	, 1.27, 1.28).	\$0
					\$1530.00
a.		entity statement is enclo		sional application an	d such status is still
	A Small e	entity statement is enclo intity statement was file id desired. ger claimed.		sional application an	d such status is still
a. b. c.	A Small e A small e proper an Is no long	ntity statement was file ad desired.	ed in the prior nonprovi		
a. b. c. 20.	A Small e A small e proper an Is no long A check in the an	ntity statement was file d desired. ger claimed.	ed in the prior nonprovi	e filing fee is enclose	d.
a. b. c. 20. [] 21. []	A Small e A small e proper an Is no long A check in the an	ntity statement was file of desired. ger claimed. nount of \$ 1530.00	to cover the	e filing fee is enclose ecordal fee is enclose	d. ed.
a. b. c. 20. [] 21. []	A Small e proper an Is no long X A check in the an A check in the an Commissioner is herel count No. 06-1205:	ntity statement was file of desired. ger claimed. nount of \$ 1530.00	to cover the to cover the to cover the recover payments or charge	e filing fee is enclose ecordal fee is enclose	d. ed.
a. b. c. 20. [3 21. [7 22. Th	A Small e proper an Is no long X A check in the an A check in the A	ntity statement was filed desired. ger claimed. nount of \$ 1530.00 nount of \$ 40.00 by authorized to credit	to cover the to cover the to cover the coverpayments or charge.	e filing fee is enclose ecordal fee is enclose	d. ed.

SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT REQUIRED					
NAME	LEONARD P. DIANA, ESQ.				
SIGNATURE	Z L P. D. 3,36				
DATE	June 1, 1998				

F502\A0603413\mw

than than that had been than

TITLE OF THE INVENTION

DATA PROCESSING APPARATUS AND METHOD THEREOF, AND MEMORY MEDIUM

5

10

15

BACKGROUND OF THE INVENTION

The present invention relates to a data processing apparatus and method thereof, a memory medium and a program. More particularly, the present invention relates to a data processing apparatus comprising connection means for connecting the data processing apparatus with a plurality of image output apparatuses, a data processing method for executing an image output job by selecting one of the plurality of image output apparatuses, and a memory medium as well as a program for controlling the data processing.

Conventionally, to execute print processing in a

system consisting of a computer and a plurality of
printers, an operator has to select a printer which is
suitable to contents of the print processing. Fig. 7 is
a block diagram showing a schematic construction of the
conventional printer system.

A printer driver 330 included in a computer 300 receives print data related to a print job generated by

15

20

a print job generator 310, and also receives printer designation data through an input unit 320 such as a keyboard or mouse or the like. The print data is given in a predetermined form, e.g. PDL (Page Description Language). The printer designation data is information which designates one of the plurality of printers 401 to 403 connected to the computer 300, by a printer name or the like.

The printer driver 330, which has received the print data and printer designation data, selects a printer based on the printer designation data and transmits the print data to the selected printer.

In the above-described system, for instance, when an operator wishes to select a printer which can complete the execution of the print job in the shortest time period, the operator must first check contents of print jobs currently being executed or on standby with respect to each of the plurality of printers, then determine a printer which is predicted to complete execution of the print job in the shortest time period based on the contents, and select the determined printer by operating the input unit 320. Such operation is quite cumbersome and not desirable from the standpoint of efficient office work.

In addition, the above-described system requires inefficient operation in a case where an operator needs

20

25

to select a printer based on its function, e.g., a printer capable of color printing, printer having high resolution, printer capable of both-sides printing and so forth. In this case, the operator must first check the function of each printer to determine a printer having the desired function and select the printer by operating the input unit 320.

SUMMARY OF THE INVENTION

The present invention has been made in consideration of the above situation, and has as its object to enable automatic selection of an image output apparatus suitable to the output form of an image, whereby reducing cumbersome operation by an operator.

A data processing apparatus (e.g., computer 100) according to the present invention, having connection means (e.g., network I/F 157) for being connected to a plurality of image output apparatuses (e.g., printers 201-203), comprises: obtain means (e.g., step S120) for obtaining an output form of an image; and selection means (e.g. step S140) for selecting an image output apparatus, which can perform output operation in the output form obtained by the obtain means, from the plurality of image output apparatuses (201-203) connected by the connection means.

It is preferable that the foregoing data

10

15

20

25

processing apparatus further comprises job assigning means (e.g., step S160) for assigning an image output job (e.g., print job) to the image output apparatus selected by the selection means.

It is preferable in the foregoing data processing apparatus that the selection means selects an image output apparatus based on a content of the image output job in addition to the output form obtained by the obtain means.

It is preferable in the foregoing data processing apparatus that the selection means selects an image output apparatus based on the content of the image output job and a state of the image output job assigned to each of the image output apparatuses, in addition to the output form obtained by the obtain means.

It is preferable in the foregoing data processing apparatus that the selection means comprises confirm means for confirming function of each of the plurality of image output apparatuses connected by the connection means, and selects an image output apparatus having function to perform output operation in the output form obtained by the obtain means.

It is preferable in the foregoing data processing apparatus that the confirm means confirms the function of each of the plurality of image output apparatuses by referring to a memory storing, in advance, data

10

15

20

indicative of the function of each of the plurality of image output apparatuses connected by the connection means.

It is preferable in the foregoing data processing apparatus that the confirm means confirms the function of each of the plurality of image output apparatuses by communicating with each of the plurality of image output apparatuses connected by the connection means.

It is preferable in the foregoing data processing apparatus that, in a case where the obtained output form designates to select an image output apparatus which completes execution of the image output job in a short time period, the selection means selects an image output apparatus which can perform output operation in the designated output form, based on the state of the image output job assigned to each of the image output apparatuses and the content of the image output job.

It is preferable that the foregoing data processing apparatus further comprises display means for displaying a message regarding an execution state of the image output job assigned to each of the plurality of image output apparatuses connected by the connection means.

It is preferable in the foregoing data processing
25 apparatus that, in a case where the obtained output form
designates to select an image output apparatus capable

15

20

25

of color image output, the selection means confirms the function of each of the plurality of image output apparatuses connected by the connection means and selects an image output apparatus which can perform output operation in the designated output form.

It is preferable in the foregoing data processing apparatus that, in a case where the obtained output form designates to select a printer capable of both-sides printing, the selection means confirms the function of each of the plurality of image output apparatuses connected by the connection means and selects a printer serving as an image output apparatus which can perform printing in the designated output form.

It is preferable in the foregoing data processing apparatus that, in a case where a size of an output image is designated by the output form, the selection means confirms the function of each of the plurality of image output apparatuses connected by the connection means and selects an image output apparatus which can perform output operation in the designated output form.

It is preferable in the foregoing data processing apparatus that, in a case where there are plural image output apparatuses which can perform output operation in the output form obtained by the obtain means, the selection means selects one of the plural image output apparatuses based on priorities set in advance.

10

15

20

25

It is preferable in the foregoing data processing apparatus that, in a case where there are plural image output apparatuses which can perform output operation in the output form obtained by the obtain means, the selection means allows an operator to select one of the plural image output apparatuses.

It is preferable in the foregoing data processing apparatus that, in a case where the output form obtained by the obtain means includes plural output forms, the selection means selects an image output apparatus which can perform output operation in all the output forms.

Furthermore, an image output system according to the present invention is characterized by comprising the above-described data processing apparatus and a plurality of image output apparatuses connected to the data processing apparatus by the connection means.

Still further, a data processing method, according to the present invention, for executing an image output job by selecting one of a plurality of image output apparatuses, comprises the steps of: obtaining an output form of an image; and selecting an image output apparatus, which can perform output operation in the output form obtained in the obtaining step, from the plurality of selectable image output apparatuses.

It is preferable that the foregoing data processing method further comprises the step of

assigning the image output job to the image output apparatus selected in the selecting step.

Still further, a memory medium according to the present invention is a memory medium storing program codes for controlling a data processing apparatus which includes connection means for being connected to a plurality of image output apparatuses, for causing the data processing apparatus to operate as an apparatus comprising: obtain means for obtaining an output form of an image; and selection means for selecting an image output apparatus, which can perform output operation in the output form obtained by the obtain means, from the plurality of image output apparatuses connected by the connection means.

It is preferable that the foregoing memory medium causes the data processing apparatus to operate as an apparatus comprising job assigning means for assigning an image output job to the image output apparatus selected by the selection means.

Other features and advantages of the present invention will be apparent from the following description taken in conjunction with the accompanying drawings, in which like reference characters designate the same or similar parts throughout the figures thereof.

25

5

10

15

20

BRIEF DESCRIPTION OF THE DRAWINGS

15

The accompanying drawings, which are incorporated in and constitute a part of the specification, illustrate embodiments of the invention, and together with the description, serve to explain the principles of the invention.

- Fig. 1 is a block diagram showing the construction of a printer system according to a preferred embodiment of the present invention;
- Fig. 2 is a block diagram showing the hardware structure of the system shown in Fig. 1;
 - Fig. 3 is a flowchart showing steps of print processing performed based on a program stored in a program memory;
 - Fig. 4 is a flowchart showing a part of processing contents performed in the selection step of the printer;
 - Figs. 5A and 5B are display examples showing a print-wait time displayed on a display screen of a display unit;
- Fig. 6 is a flowchart describing processing

 20 contents according to another embodiment, performed in the selection step of the printer; and
 - Fig. 7 is a block diagram showing a schematic construction of the conventional printer system.
- DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

 Preferred embodiment of the present invention will

15

20

25

be described in detail in accordance with the accompanying drawings.

Fig. 1 is a block diagram showing the construction of a printer system according to the preferred embodiment of the present invention. This system comprises a computer 100 and a plurality of printers 201 to 203 connected to the computer 100.

The computer 100 includes a print job generator 110 (e.g., application program) which generates print 10 jobs, an input unit 120 such as a keyboard or mouse or the like, and a printer driver 130.

The printer driver 130 includes printer interface units (printer I/F) 132 to 134, respectively connected to the plurality of printers 201 to 203, and a printer selector 131 which selects a printer to execute a print job based on necessary data on the print job data which is supplied by the print job generator 110, selection condition data inputted by an operator through the input unit 120, printer data 131a related to the function of each of the printers, data related to a print execution state of print jobs assigned to respective printers.

Herein, the print job data is information related to a print job, which is considered when the printer driver 130 selects a printer. Examples of print job data are the total number of pages of the print job, file size, paper size and so on.

15

20

The selection condition data, which is designated by an operator, is information related to an output form (requirement) considered by the printer driver 130 in order to select a printer. Examples of the selection condition data are the printer which completes execution of a print job in the shortest time period, printer capable of color printing, printer capable of both-sides printing, printer capable of using the print paper size designated by the print job and so on.

The printer data 131a may be set, in advance, in the internal portion e.g., printer selector 131 or the like, of the printer driver. Alternatively, the printer driver 130 may obtain printer data from each of the printers through respective printer I/F units at the time of system start-up. Alternatively, printer data may be prepared by other means. Examples of the printer data 131a are the printer name, manufacturer's name of the printer, printing method (e.g., ink-jet printing method, electrophotographic printing method), whether or not the printer has a color printing function, printing speed (e.g., printing time per page), printable paper sizes, resolution, interpretable page description languages and so on.

Fig. 2 is a block diagram showing the hardware

structure of the system shown in Fig. 1. The computer

loo includes a CPU 151, RAM 152, program memory 153,

hard disk (HD) 154, display unit 155, keyboard/mouse 156 and network I/F unit 157, all of which are connected by a CPU bus 158.

In the program memory 153, a program 153a is

stored for enabling the computer 100 to operate as an apparatus comprising the print job generator 110, input unit 120 and printer driver 130. The program memory 153 can be constructed by a floppy disk, hard disk, CD-ROM and other memory media. The program memory 153 itself, storing the program 153a, constitutes the present invention. The program 153a itself constitutes a statutory invention.

In the hard disk 154, the aforementioned printer data 131a is stored. Note that, as described above, it is also effective that the printer driver obtains printer data 131a from each of the printers through the network I/F unit 157 at the time of system start-up.

Herein, corresponding relationships between components shown in Fig. 1 and components shown in Fig. 2 are described. The print job generator 110 corresponds to the program 153a; input unit 120 corresponds to the keyboard/mouse 156 and program 153a; printer selector 131 of the printer driver 130 corresponds to the program 153a; and printer I/F units 132 to 134 correspond to the network I/F unit 157 and program 153a. Herein, the network I/F unit 157 specifies the plurality of printers

10

15

201 to 203 connected to a network cable 210 by respective addresses, whereby logically constructing the plurality of printer I/F units 132 to 134.

Next, description will be provided on operation related to print processing performed by the computer 100 based on the program 153a. Fig. 3 is a flowchart showing the steps of print processing based on the program 153a. The print processing is started, for instance, when a print request is issued by an application program (not shown).

First in step S100, a print job is generated based on the print request. More specifically, in this step, print data, e.g., PDL data or the like, corresponding to the resolution, print paper size and so on designated by the application program, is generated. Further, in this step, information considered when the printer driver 130 selects a printer, e.g., the total number of pages of the print job, file size, print paper size and so on, is generated.

In step S110, the print job data generated in step S100 is obtained. More specifically, for instance, the print job data generated in step S100 is copied to a predetermined area (area referred to in step S140) of the RAM 152.

In step S120, selection condition data is obtained from the keyboard/mouse 156. For instance, a message

10

15

20

25

asking an operator to designate a selection condition is displayed on the display unit 155, and data inputted by an operator in response to the displayed message is captured as the selection condition data and stored in the predetermined area of the RAM 152.

Herein, it is preferable to limit the selection conditions, which can be designated by an operator, within such range that at least one of the plurality of printers 201 to 203 satisfies the designated selection condition. By setting such limitation, it is possible to prevent the situation where there is no printer which satisfies the designated selection condition, at the time of selecting a printer in step S140. As the method of setting the limitation to the selection conditions, for instance, it is preferable to display only the selectable conditions on the display unit 155 and allow the operator to select the desired selection condition from the displayed selection conditions.

In step S130, printer data is obtained. For instance, the printer data 131a stored in the hard disk 154 is copied to the predetermined area of the RAM 152.

In step S140, a printer for executing the print job is selected, while considering the print job data, selection condition data and printer data stored in the predetermined area of the RAM 152, as well as the state of print job execution as necessary. Note that in step

15

20

25

S140, operation states of each of the printers 201 to 203 connected to the network cable 210 are confirmed via the network I/F unit 157, and for instance, if the selected printer is in a state incapable of print operation, it is preferable to set a printer again for executing the print job from the printers other than the selected one.

Meanwhile, there is a case where a plurality of printers satisfy the designated selection condition. To cope with this situation, it is preferable to include the function for selecting one of the printers based on priorities set in advance in the printers 201 to 203, or function which allows an operator to select a desired printer from the plurality of printers when such situation arises.

In step S150, a message is displayed on the display unit 155 to indicate which printer has been selected from the plurality of printers 201 to 203. By displaying the message, the operator is able to recognize the printer automatically selected by the computer 100.

In step S160, the print job generated in step S100 is assigned to the selected printer and the series of processing ends. Note that if the print data needs to be converted to conform to the selected printer, such conversion is performed.

20

25

The print job assigned to each printer is executed, for instance, after the preceding print job is completed, and print data is transmitted to the corresponding printer via the network I/F unit 157.

5 Hereinafter, operation examples of the computer 100 will be described.

[Operation Example 1]

Operation Example 1 relates to the processing in

step S140 (Fig. 3), performed in a case where the
selection condition data obtained in step S120
designates to select a printer which completes execution
of the print job in the shortest time period.

Fig. 4 is a flowchart showing a part of specific processing contents performed in step S140.

In step S200, it is determined whether or not the selection condition data, inputted by the operator in step S120, designates a printer which completes the print job execution in the shortest time period. If the result of determination is YES, the processing proceeds to step S210, while if the result is NO, the processing proceeds to step S250.

In step S210, job control data, indicative of progress of the print job assigned to each printer, is obtained. Note that the job control data is controlled by, for instance, another program (e.g., which

15

20

constitutes a part of the program 153a) provided for controlling print jobs.

In the present embodiment, it is assumed that the job control data includes the following information with respect to each of the printers 201 to 203:

- remaining number of pages P1 of the print job currently being executed (number of pages not yet outputted)
- file size F1 of the remaining print data related
 to the print job currently being executed (file size of print data not yet transmitted)
 - total number of pages P2i (i=1 to n) of respective print jobs (1 to n) waiting to be printed
 - file size F2i (i=1 to n) of print data related to respective print jobs (1 to n) waiting to be printed

In step S220, time (time T1 required for printing) required to complete print jobs respectively assigned to the printers 201 to 203 is predicted with respect to each printer based on the obtained job control data. The time T1 required for printing can be predicted by, for instance, equation (1) where time required by each printer to print a page is represented by TP (a part of printer data).

25
$$T1 = P1/TP + \sum_{i=1}^{n} (P2_{i}/TP) \qquad ...(1)$$

In step S230, time (time required for printing T2) required by each of the printers to complete the print job generated in step S100 is predicted, assuming a case where the print job generated in step S100 is assigned to each of the printers 201 to 203. The time T2 required for printing can be predicted by, for instance, equation (2) where the total number of pages of the print job is represented by P3.

10

$$T2 = T1 + P3/TP \qquad \dots (2)$$

Herein, taking into account of the time for transmitting the print data to the printer, above

15 equations (1) and (2) can be substituted with equation (1') and (2') respectively. Assume that R is transmission speed between the network I/F unit 157 and each of the printers, and F3 is a file size of print data related to the print job.

20

$$T1 = P1/TP + \sum_{i=1}^{n} (P2_{i}/TP) + F1/R + \sum_{i=1}^{n} (F2_{i}/R) \dots (1')$$

$$T2 = T1 + P3/TP + F3/R \dots (2')$$

In step S240, a printer having the least value T2, calculated with respect to each of the printers 201 to 203, is selected. In other words, a printer which

10

15

20

25

completes the print job execution in the shortest time period is selected.

The computer 100 according to the present embodiment has function to provide an operator with time (print-wait time) required to complete execution of print jobs respectively assigned to each of the printers based on the job control data. Figs. 5A and 5B show examples of a print-wait time displayed on the display screen of the display unit 155.

When the operator instructs to display the print-wait time by using the keyboard/mouse 156, a window 510 is displayed on the display screen of the display unit 155 as shown in Fig. 5A. The example in Fig. 5A shows that the printer named "LBP-730" (e.g., printer 201) has a print-wait time (corresponding to T2) of 3 minutes and 50 seconds.

When the operator selects a desired printer (name of the printer) from the window 510 shown in Fig. 5A, a window 520 (Fig. 5B) showing a list of print-wait time with respect to each of the print jobs assigned to the printer is displayed. Fig. 5B shows an example of the window displayed in a case where the operator selects the "LBP-730" from the window 510 in Fig. 5A. In the example in Fig. 5B, "print job 1" is the print job currently being executed, and the "print-wait time" to complete the print job is 20 seconds (corresponding to

P1/TP in equation (1)). "Print job 2" and "print job 3" are in the print-wait state, and time required to complete the print jobs are "2 minutes and 10 seconds" and "1 minute and 20 seconds" respectively (corresponding to P2;/TP in equation (1)).

[Operation Example 2]

5

10

15

20

25

Operation Example 2 relates to print processing performed in a case where the selection condition data obtained in step S120 (Fig. 3) designates to select a printer capable of color printing.

According to the operation example 2, a printer capable of color printing is selected based on the printer data in step S140 in Fig. 3, then a message identifying the selected printer is displayed on the display unit 155 in step S150, and the print job is assigned to the selected printer in step S160.

The processing in step S140 in this case is explained by adapting the flowchart shown in Fig. 4. In step S200, determination is made that the selection condition data does not designate the "printer which completes the print job execution in the shortest time period." Therefore, the processing proceeds to step S250 where a printer satisfying the designated selection condition (printer capable of color printing) is selected.

15

20

[Operation Example 3]

Operation Example 3 relates to print processing performed in a case where the selection condition data obtained in step S120 (Fig. 3) designates to select a printer capable of both-sides printing.

According to the operation example 3, a printer capable of both-sides printing is selected based on the printer data in step S140 in Fig. 3, then a message identifying the selected printer is displayed on the display unit 155 in step S150, and the print job is assigned to the selected printer in step S160.

The processing in step S140 in this case is explained by adapting the flowchart shown in Fig. 4. In step S200, determination is made that the selection condition data does not designate the "printer which completes the print job execution in the shortest time period." Therefore, the processing proceeds to step S250 where a printer satisfying the designated selection condition (printer capable of both-sides printing) is selected.

[Operation Example 4]

Operation Example 4 relates to print processing
25 performed in a case where the selection condition data
obtained in step S120 (Fig. 3) designates to select a

15

20

printer which is capable of using a print paper size conforming to a paper size designated by the print job.

According to the operation example 4, in step S140 in Fig. 3, print paper sizes which can be processed by each of the printers 201 to 203 are confirmed based on the printer data, and a paper size designated by the print job is confirmed. Then, a printer capable of performing print operation using the paper size designated by the print job is selected. Then in step S150, a message identifying the selected printer is displayed on the display unit 155, and in step S160, the print job is assigned to the selected printer.

The processing in step S140 in this case is explained by adapting the flowchart shown in Fig. 4. In step S200, determination is made that the selection condition data does not designate the "printer which completes the print job execution in the shortest time period." Therefore, the processing proceeds to step S250 where a printer satisfying the designated selection condition (printer capable of using a print paper size conforming to a paper size designated by the print job) is selected.

[Operation Example 5]

Operation Example 5 is applicable to a case where an operator designates plural selection conditions. Fig.

10

25

6 is a flowchart which describes processing performed in step S140 (Fig. 3) according to the operation example 5.

In step S300, the number of designated selection conditions is confirmed based on the selection condition data obtained in step S120. In step S310, the number of selection conditions is stored as a variable n. In step S320, a parameter i used in the subsequent processing is set to 1 (initializing).

In step S330, a list of printers satisfying the ith selection condition is generated, as the i-th list, based on the print job data, printer data and so on. The list is generated in the form such as "printer A and Printer B".

In step S340, the parameter i is incremented by 1, and in step S350, the value of parameter i is compared with the value of variable n in order to determine whether or not generation of the n-th list has been completed. If it is not completed, the processing returns to step S330, while if it is completed, the processing proceeds to step S360. In other words, by executing the processing of steps S330 to S350, the first to n-th lists are generated.

In step S360, a printer satisfying all of the first to n-th selection conditions is selected based on the first to n-th lists. Herein, in a case where there are plural printers satisfying the designated selection

15

20

25

conditions, one of the printers is selected based on, for instance, predetermined priorities and the like.

As has been set forth above, according to the present invention, a printer which satisfies the selection condition designated by an operator is automatically selected. Therefore, cumbersome operation by the operator is largely reduced.

Note that the present invention can be applied to a system constituted by a plurality of devices (e.g., host computer, interface, reader, printer) or to an apparatus comprising a single device (e.g., copy machine, facsimile).

Further, the object of the present invention can be also achieved by providing a storage medium storing program codes for performing the aforesaid processes to a system or an apparatus, reading the program codes with a computer (e.g., CPU, MPU) of the system or apparatus from the storage medium, then executing the program.

In this case, the program codes read from the storage medium realize the new functions according to the invention, and the storage medium storing the program codes constitutes the invention.

Further, the storage medium, such as a floppy disk, hard disk, an optical disk, a magneto-optical disk, CD-ROM, CD-R, a magnetic tape, a non-volatile type memory card, and ROM can be used for providing the program

codes.

5

20

Furthermore, besides aforesaid functions according to the above embodiment are realized by executing the program codes which are read by a computer, the present invention includes a case where an OS (Operating System) or the like working on the computer performs a part or entire processes in accordance with designations of the program codes and realizes functions according to the above embodiment.

10 Furthermore, the present invention also includes a case where, after the program codes read from the storage medium are written in a function expansion card which is inserted into the computer or in a memory provided in a function expansion unit which is connected to the computer, a CPU or the like contained in the function expansion card or unit performs a part or entire process in accordance with designations of the program codes and realizes functions of the above embodiment.

According to the present invention, it is possible to realize automatic selection of an image output apparatus suitable to contents of an image output job.

By this, cumbersome operation performed by an operator is reduced.

25 The present invention is not limited to the above embodiments and various changes and modifications can be

made within the spirit and scope of the present invention. Therefore, to appraise the public of the scope of the present invention, the following claims are made.

10

15

20

25

WHAT IS CLAIMED IS:

1. A data processing apparatus having connection means for being connected to a plurality of image output apparatuses, comprising:

obtain means for obtaining an output form of an image;

selection means for selecting an image output apparatus, which can perform output operation in the output form obtained by said obtain means, from the plurality of image output apparatuses connected by said connection means; and

job assigning means for assigning an image output job to the image output apparatus selected by said selection means.

- 2. The data processing apparatus according to claim 1, wherein said selection means selects an image output apparatus based on a content of the image output job in addition to the output form obtained by said obtain means.
- 3. The data processing apparatus according to claim 1, wherein said selection means selects an image output apparatus based on the content of the image output job and a state of the image output job assigned to each of

the image output apparatuses, in addition to the output form obtained by said obtain means.

- 4. The data processing apparatus according to claim 1, wherein said selection means comprises confirm means for confirming function of each of the plurality of image output apparatuses connected by said connection means, and selects an image output apparatus having function to perform output operation in the output form obtained by said obtain means.
- 5. The data processing apparatus according to claim 4, wherein said confirm means confirms the function of each of the plurality of image output apparatuses by referring to a memory storing, in advance, data indicative of the function of each of the plurality of image output apparatuses connected by said connection means.
- 20 6. The data processing apparatus according to claim 4, wherein said confirm means confirms the function of each of the plurality of image output apparatuses by communicating with each of the plurality of image output apparatuses connected by said connection means.

25

7. The data processing apparatus according to claim 1,

wherein in a case where the obtained output form designates to select an image output apparatus which completes execution of the image output job in a short time period, said selection means selects an image output apparatus which can perform output operation in the designated output form, based on the state of the image output job assigned to each of the image output apparatuses and the content of the image output job.

10 8. The data processing apparatus according to claim 1, further comprising display means for displaying a message regarding an execution state of the image output job assigned to each of the plurality of image output apparatuses connected by said connection means.

15

5

- 9. The data processing apparatus according to claim 1, wherein in a case where the obtained output form designates to select an image output apparatus capable of color image output, said selection means confirms the function of each of the plurality of image output apparatuses connected by said connection means and selects an image output apparatus which can perform output operation in the designated output form.
- 25 10. The data processing apparatus according to claim 1, wherein in a case where the obtained output form

designates to select a printer capable of both-sides printing, said selection means confirms the function of each of the plurality of image output apparatuses connected by said connection means and selects a printer serving as an image output apparatus which can perform printing in the designated output form.

11. The data processing apparatus according to claim 1, wherein in a case where a size of an output image is designated by the output form, said selection means confirms the function of each of the plurality of image output apparatuses connected by said connection means and selects an image output apparatus which can perform output operation in the designated output form.

15

20

25

10

5

- 12. The data processing apparatus according to claim 1, wherein in a case where there are plural image output apparatuses which can perform output operation in the output form obtained by said obtain means, said selection means selects one of the plural image output apparatuses based on priorities set in advance.
- 13. The data processing apparatus according to claim 1, wherein in a case where there are plural image output apparatuses which can perform output operation in the output form obtained by said obtain means, said

selection means allows an operator to select one of the plural image output apparatuses.

- 14. The data processing apparatus according to claim 1,

 5 wherein in a case where the output form obtained by said
 obtain means includes plural output forms, said
 selection means selects an image output apparatus which
 can perform output operation in all the output forms.
- 10 15. An image output system comprising the data processing apparatus disclosed in claim 1 and a plurality of image output apparatuses connected to the data processing apparatus by said connection means.
- 15 16. A data processing method for executing an image output job by selecting one of a plurality of image output apparatuses, comprising the steps of:

obtaining an output form of an image;

selecting an image output apparatus, which can
perform output operation in the output form obtained in
said obtaining step, from the plurality of selectable
image output apparatuses; and

assigning the image output job to the image output apparatus selected in said selecting step.

25

17. The data processing method according to claim 16,

wherein in said selecting step, an image output apparatus is selected based on a content of the image output job in addition to the output form obtained in said obtaining step.

5

10

- 18. The data processing method according to claim 16, wherein in said selecting step, an image output apparatus is selected based on the content of the image output job and a state of the image output job assigned to each of the image output apparatuses, in addition to the output form obtained in said obtaining step.
- 19. The data processing method according to claim 16, wherein said selecting step comprises a step of confirming function of each of the plurality of selectable image output apparatuses, and an image output apparatus having function to perform output operation in the output form obtained in said obtaining step is selected.

20

25

15

20. The data processing method according to claim 19, wherein in said confirming step, the function of each of the plurality of image output apparatuses is confirmed by referring to a memory storing, in advance, data indicative of the function of each of the selectable image output apparatuses.

- 21. The data processing method according to claim 19, wherein in said confirming step, the function of each of the plurality of image output apparatuses is confirmed by communicating with each of the selectable image output apparatuses.
- 22. The data processing method according to claim 16, wherein in a case where the obtained output form

 10 designates to select an image output apparatus which completes execution of the image output job in a short time period, in said selecting step, an image output apparatus which can perform output operation in the designated output form is selected based on the state of the image output job assigned to each of the image output job.
- 23. The data processing method according to claim 16, further comprising a step of displaying a message regarding an execution state of the image output job assigned to each of the selectable image output apparatuses.
- 25 24. The data processing method according to claim 16, wherein in a case where the obtained output form

designates to select an image output apparatus capable of color image output, in said selecting step, the function of each of the selectable image output apparatuses is confirmed, and an image output apparatus which can perform output operation in the designated output form is selected.

- 25. The data processing method according to claim 16, wherein in a case where the obtained output form

 10 designates to select a printer capable of both-sides printing, in said selecting step, the function of each of the selectable image output apparatuses is confirmed and a printer serving as an image output apparatus which can perform printing in the designated output form is selected.
- 26. The data processing method according to claim 16, wherein in a case where a size of an output image is designated by the output form, in said selecting step, the function of each of the selectable image output apparatuses is confirmed and an image output apparatus which can perform output operation in the designated output form is selected.
- 25 27. The data processing method according to claim 16, wherein in a case where there are plural image output

apparatuses which can perform output operation in the output form obtained in said obtaining step, one of the plural image output apparatuses is selected in said selecting step based on priorities set in advance.

5

10

- 28. The data processing method according to claim 16, wherein in a case where there are plural image output apparatuses which can perform output operation in the output form obtained in said obtaining step, one of the plural image output apparatuses is selected in said selecting step based on an instruction inputted by an operator.
- 29. The data processing method according to claim 16,
 wherein in a case where the output form obtained in said
 obtaining step includes plural output forms, an image
 output apparatus which can perform output operation in
 all the output forms is selected in said selecting step.
- 20 30. A data processing apparatus having connection means for being connected to a plurality of image output apparatuses, comprising:

obtain means for obtaining an output form of an image; and

selection means for selecting an image output apparatus, which can perform output operation in the

25

output form obtained by said obtain means, from the plurality of image output apparatuses connected by said connection means.

5 31. A data processing method for executing an image output job by selecting one of a plurality of image output apparatuses, comprising the steps of:

obtaining an output form of an image; and
selecting an image output apparatus, which can

perform output operation in the output form obtained in
said obtaining step, from the plurality of selectable
image output apparatuses.

- 32. A memory medium storing program codes for

 15 controlling a data processing apparatus which includes connection means for being connected to a plurality of image output apparatuses, for causing the data processing apparatus to operate as an apparatus comprising:
- obtain means for obtaining an output form of an image;

selection means for selecting an image output apparatus, which can perform output operation in the output form obtained by said obtain means, from the plurality of image output apparatuses connected by said connection means; and

job assigning means for assigning an image output job to the image output apparatus selected by said selection means.

- 5 33. A program for controlling a data processing apparatus having connection means for being connected to a plurality of image output apparatuses, for causing the data processing apparatus to operate as an apparatus comprising:
- obtain means for obtaining an output form of an image;

selection means for selecting an image output apparatus, which can perform output operation in the output form obtained by said obtain means, from the plurality of image output apparatuses connected by said connection means; and

job assigning means for assigning an image output job to the image output apparatus selected by said selection means.

20

15

- 34. A memory medium storing program codes for controlling a data processing apparatus which includes connection means for being connected to a plurality of image output apparatuses, for causing the data
- 25 processing apparatus to operate as an apparatus comprising:

5

15

20

obtain means for obtaining an output form of an image; and

selection means for selecting an image output apparatus, which can perform output operation in the output form obtained by said obtain means, from the plurality of image output apparatuses connected by said connection means.

35. A program for controlling a data processing

10 apparatus having connection means for being connected to
a plurality of image output apparatuses, for causing the
data processing apparatus to operate as an apparatus
comprising:

obtain means for obtaining an output form of an image; and

selection means for selecting an image output apparatus, which can perform output operation in the output form obtained by said obtain means, from the plurality of image output apparatuses connected by said connection means.

5

10

ABSTRACT OF THE DISCLOSURE

The present invention relates to a system having a computer and a plurality of printers connected to the computer. A printer selector selects a printer which can perform printing in the output form inputted by an operator through an input unit such as a keyboard or the like, based on print job data or printer data or the like. By inputting the output form, a printer having desired function e.g., printer capable of color printing or capable of both-sides printing and the like, is automatically selected.

FIG. 1

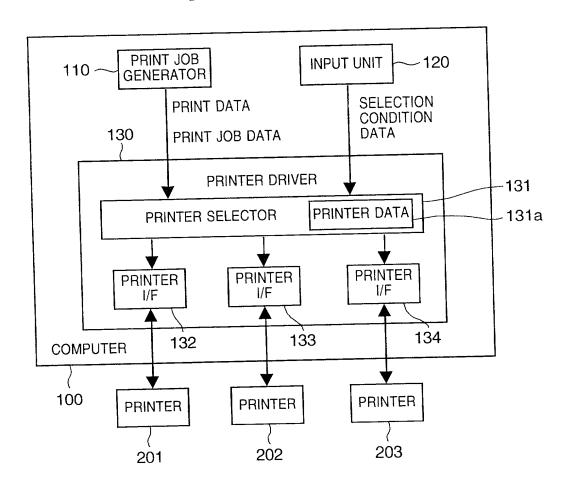


FIG. 2

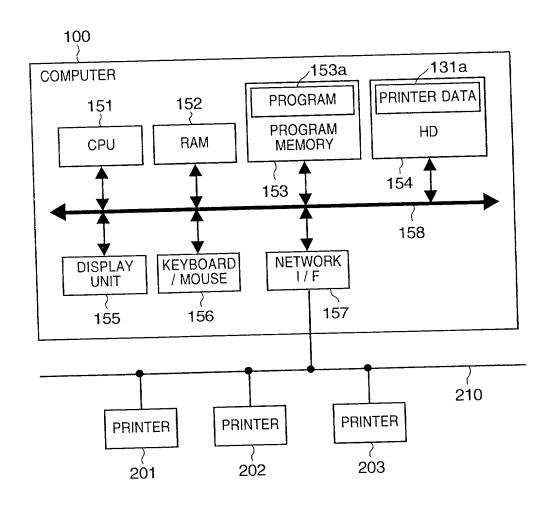


FIG. 3

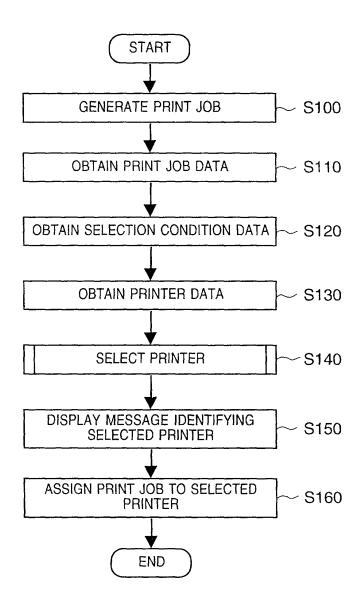


FIG. 4

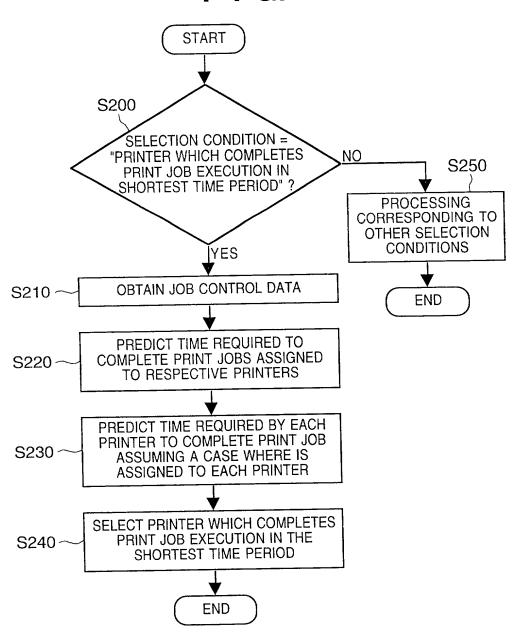


FIG. 5A

WINDO	W			
	PRINTER NAME		PRINT-WAIT TIME	
	LBP - 730		3' 50"	
	LBP - 600		1' 30"	
	LBP - 300	٦	5' 20"	~ 510
		اً		
		Ī		
		_ <u>_</u>		

FIG. 5B

WINDOW		
PRINTER NAME	LBP - 730	
PRINT JOB NAME	PRINT-WAIT TIME	
PRINT JOB 1	20"	
PRINT JOB 2	2' 10"	
PRINT JOB 3	1' 20"	


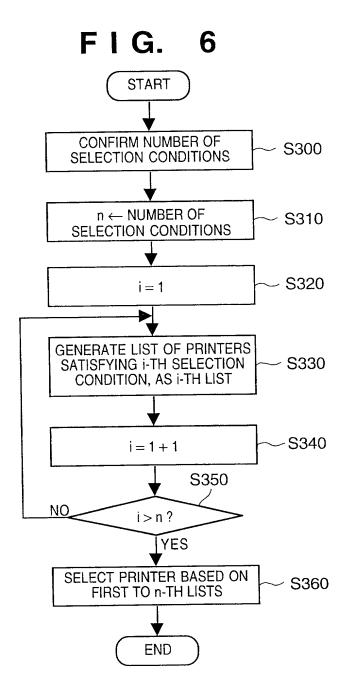


FIG. 7

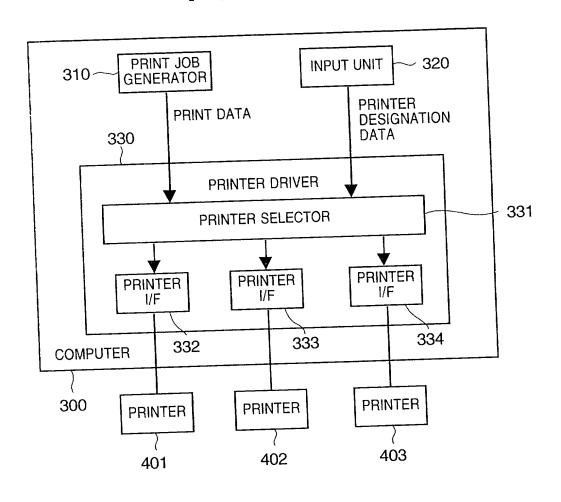

COMBINED DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:
My residence, post office address and citizenship are as stated below next to my
name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled DATA PROCESSING APPARATUS AND METHOD THEREOF, AND MEMORY

The specification of which

MEDIUM the specification of which

[X]is attached hereto. [] was filed on ______ as Application No. _____ and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Country	Application No.	Filed (Day/Mo./Yr.)	(Yes/No) Priority Claimed
JAPAN	9-151357	09/06/1997	Yes

I hereby appoint Joseph M. Fitzpatrick (Registration No. 17,398), Lawrence F. Scinto (Registration No. 18,973), William J. Brunet (Registration No. 20,452), Robert L. Baechtold (Registration No. 20,860), John A. O'Brien (Registration No. 24,367), John A. Krause (Registration No. 24,613), Henry J. Renk (Registration No. 25,499), Peter Saxon (Registration No. 24,947), Anthony M. Zupcic (Registration No. 27,276), Charles P. Baker (Registration No. 26,702), Stevan J. Bosses (Registration No. 22,291), Edward E. Vassallo (Registration No. 29,117), Ronald A. Clayton (Registration No. 26,718), Lawrence A. Stahl (Registration No. 30,110), Laura A. Bauer (Registration No. 29,767), Leonard P. Diana (Registration No. 29,296), David M. Quinlan (Registration No. 26,641), Nicholas N. Kallas (Registration No. 31,530), William M. Wannisky (Registration No. 28,373), Lawrence S. Perry (Registration No. 31,865), Robert H. Fischer (Registration No. 30,051), Christopher Philip Wrist 28,373), Lawrence S. Perry (Registration No. 31,865), Robert H. Fischer (Registration No. 30,051), Christopher Philip Wrist 28,373), Lawrence S. Perry (Registration No. 28,861), Michael K. O'Neill (Registration No. 32,622), Bruce C. (Registration No. 32,734), Scott K. Reed (Registration No. 22,433), Scott D. Malpede (Registration No. 32,622), Richard P. Bauer (Registration No. 31,588), Warren E. Olsen (Registration No. 72,290), M. Zullow (Registration No. 32,452), Richard P. Bauer (Registration No. 33,326), Thomas J. O'Connell (Registration No. 33,202), Ason C. Deditch (Registration No. 33,855), Penina Wollman (Registration No. 30,816), David L. Schaeffer (Registration No. 32,716), Jack S. Cubert (Registration No. 24,245), Mark A. Williamson (Registration No. 33,628), John T. (Registration No. 34,528), Mark J. Itri (Registration No. 30,938), Raymond R. Mandra (Registration No. 34,382) Whelan (Registration No. 33,656), Steven C. Bauman (Registration No. 36,169), Karin L. Williams (Registration No. 34,228), Mark J. Itri (Registration No. 37,345), Jack M. A

Address all correspondence to:

Fitzpatrick, Cella, Harper & Scinto 277 Park Avenue New York, N.Y. 10172 Telephone No. (212) 758-2400

COMBINED DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

(Page 2)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole or First Inventor Ryuzo KOANA
Inventor's signature Ryugo Roana ———————————————————————————————————
Date May 25 1998 Citizen/Subject of Japan
Inventor's signature Ryuso Koana
Japan
Post Office Address <u>c/o CANON KABUSHIKI KAISHA</u> ,
30-2, Shimomaruko 3-chome, Ohta-ku, Tokyo, Japan
Full Name of Second Joint Inventor, if any
Second Inventor's signature
Second Inventor's signatureCitizen/Subject of
Residence
Post Office Address
Full Name of Third Joint Inventor, if any
Third Inventor's signature
Third Inventor's signatureCitizen/Subject of
Residence
Post Office Address
Full Name of Fourth Joint Inventor, if any
Fourth Inventor's signature
Fourth Inventor's signatureCitizen/Subject of
Residence
Post Office Address
Full Name of Fifth Joint Inventor, if any
Fifth Inventor's signature
Fifth Inventor's signatureCitizen/Subject of
Residence
Post Office Address
1 Ost Office Address
Full Name of Sixth Joint Inventor, if any
Fifth Inventor's signature
Fifth Inventor's signatureCitizen/Subject of
Residence
Post Office Address

F510/A206564/nms